


PCB MOUNTING - Miniature


OKO type K6 series A & B

Miniature, general purpose, **single pole** changeover relays with an industry standard footprint and a low profile package. Low power consumption. Choice of **5A** or **12A** contact rating. Fully sealed 'vented' construction. Supplied in tubes.

- ◆ **SPCO** silver alloy or silver-tin
- ◆ **Miniature low profile** package
- ◆ Very competitively priced
- ◆ Choice of **5A** or **12A** rating
- ◆ Industry standard
- ◆ **Fully sealed**

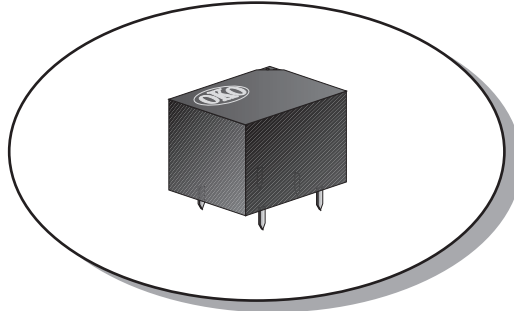

Contacts:	SPCO rated DC: 5A, 30V or 12A, 28V AC: 5A, 120V or 12A, 277V Silver alloy or silver-tin oxide
Coil:	Power consumption 3-24Vdc: 360mW 48Vdc: 510mW Operating voltage range 80-120%
Speed:	Operating time 10ms max. Release time 5ms max.
Life Expectancy:	Mechanical: 10 x 10 ⁶ operations min. Electrical: 1 x 10 ⁵ operations min.
Operating Temperature Range:	-40°C to +70°C
Certification:	

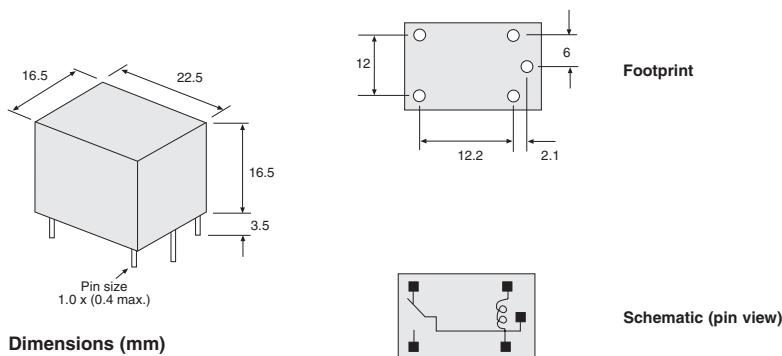

5A CONTACT RATING

Coil Voltage/Resistance

3Vdc/25Ω
5Vdc/70Ω
6Vdc/100Ω
9Vdc/225Ω
12Vdc/400Ω
24Vdc/1600Ω
48Vdc/4500Ω

Part No.

K6A03
K6A05
K6A06
K6A09
K6A12
K6A24
K6A48

12A CONTACT RATING

Coil Voltage/Resistance

3Vdc/25Ω
5Vdc/70Ω
6Vdc/100Ω
9Vdc/225Ω
12Vdc/400Ω
24Vdc/1600Ω
48Vdc/4500Ω

Part No.

K6B03
K6B05
K6B06
K6B09
K6B12
K6B24
K6B48