


RATING	OUTPUT (V)
<b>6VA</b>	6+6 9+9 12+12 15+15
<b>12VA</b>	6+6 9+9 12+12 15+15
<b>20VA</b>	6+6 9+9 12+12 15+15
<b>50VA</b>	6+6 9+9 12+12 15+15
<b>75VA</b>	6+6 9+9 12+12 15+15 50+50
<b>100VA</b>	9+9 12+12 15+15 50+50
<b>200VA</b>	9+9 12+12 15+15 50+50

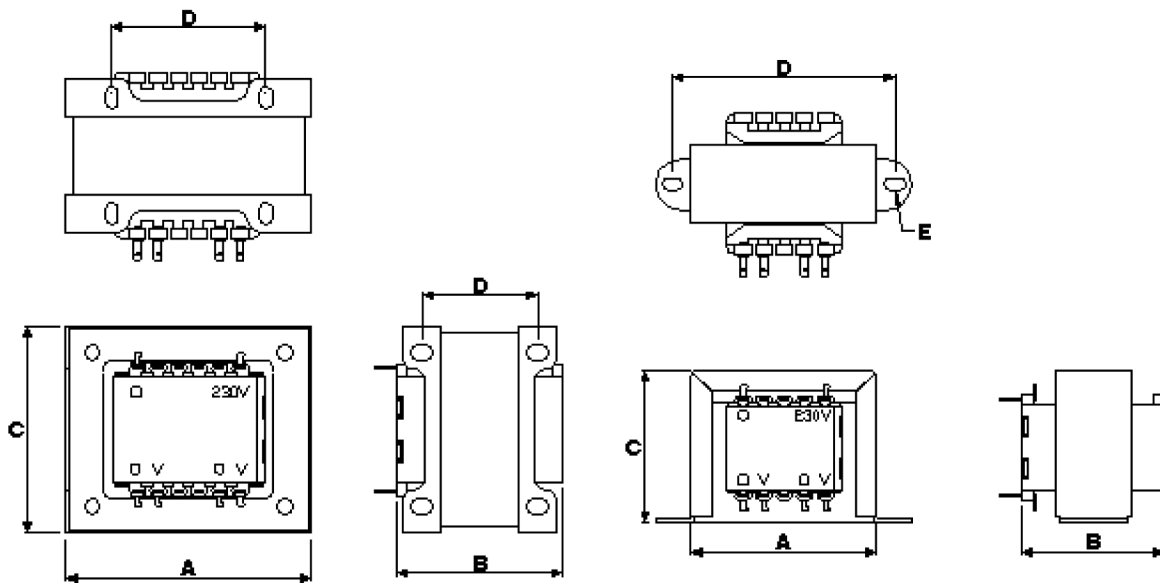

RATING (VA)		6	12	20	50	75	100	200
Length	A	45	60	60	79	80	89	102
Width	B	35.5	47	52	60	71	65	85
Height	C	37.5	50	50	66	67	75	88
Fixing Centres	D	55	74	74	93.9	55x54	44x57	68x72
Fixing Slot	E	4BA	2BA	2BA	2BA	4BA	M5	M5
Weight		0.17	0.38	0.53	0.98	1.48	1.55	2.75
Typical Regulation	(%)	24	12	12	10	8	10	8

Dimensions in mm, weight in gms. Dimensions and weights are approximate. Specifications may be changed without notice.  
 \* +/- 0.5mm